



STEPABOVE[®] STEPS

INSTALLATION INSTRUCTIONS

GEN II



Above. Beyond. Always.

STEPABOVE

INSTALLATION INSTRUCTIONS



BEFORE YOU INSTALL YOUR STEPS

Make sure that you've reviewed the **StepAbove Qualification Guide** to determine the correct StepAbove for your unit. There is a chance the step won't fit if the correct measurements weren't taken before purchasing.

Internally storable RV entry/exit step system with a weight rating of 500 lbs.

Note: Steps should only be lowered or raised/stowed from **OUTSIDE** of the RV.

PREPARATION

General Safety & Warnings:

- ⚠ WARNING** Read and understand all instructions and warnings prior to installation.
- ⚠ WARNING** Failure to follow the instructions and heed the warnings of this document may result in injury, damage to the trailer and/or property, and/or voidance of the product warranty. Always utilize appropriate safety equipment, i.e. proper eye protection, hearing protection, gloves, etc.
- ⚠ WARNING** You are personally responsible for following safe installation procedures and completing appropriate safety checks.
- ⚠ WARNING** Due to the variety of installation applications, mounting clearances, and surface materials, a generic hardware pack is supplied for convenience. It is at the discretion of the installer to choose the hardware that best suits specific needs. MORryde does not take ownership of any wrongly installed product or damage that may result from a wrongly installed product.



Above. Beyond. Always.

STEPABOVE

INSTALLATION INSTRUCTIONS

Please take a moment to review the **StepAbove® Qualification Guide** before proceeding with these Installation Instructions.


STEP 1

Remove the step transition strip between the threshold of the existing door and the floor.




STEP 3

With the StepAbove® centered and flush against the threshold, attach one screw in each of the top corner holes where the plate is notched.

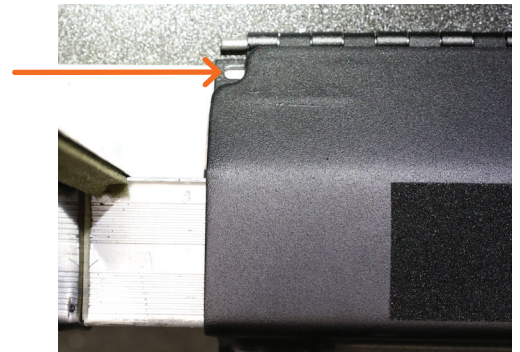

STEP 2


With the StepAbove® in the downward position, center it in the door opening. Adjust the steps until the hinge plate is centered and flush against the threshold.

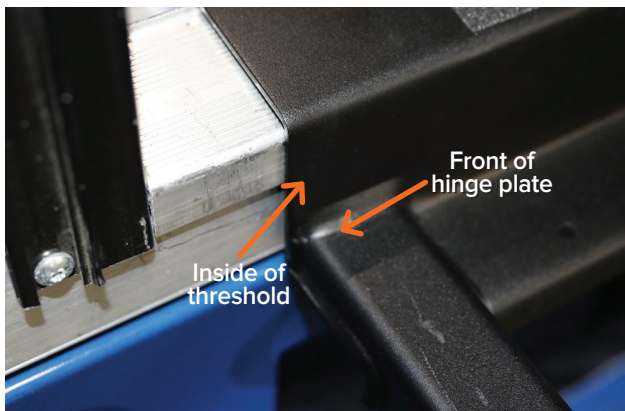

STEP 4

Lift the StepAbove® and lock into place. Ensure that the latches have engaged with the flange of the door jamb. The latches may need to be adjusted in or out; this can be accomplished by loosening the bolts and sliding it into place.

NOTE: Some doors may require the interior wood or trim work to be notched. For assistance with any modification, please call our Parts Department at 574-293-1581.

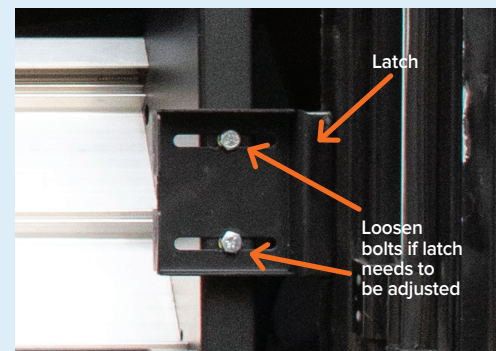

Above. Beyond. Always.

STEPABOVE

INSTALLATION INSTRUCTIONS

STEP 5

Lower the steps and then shut both the screen door and the outside door to ensure they close properly with the StepAbove® in the lowered position.



STEP 7

Make sure the StepAbove® operates smoothly and aligns correctly.



STEP 6

Raise the StepAbove® into the locked position and secure the hinge plate with the (6) remaining screws. There will be a gap between the hinge plate and the threshold.

NOTE: The legs of the StepAbove® are adjustable and may need to be retracted in order to fit inside the door opening.

