

# I-BEAM MOUNT STABILIZER



QUALIFIER

SP54-253

## BEFORE YOU BEGIN

Please note these compatibility limitations:

The MORryde **I-Beam Stabilizer** consists of two adjustable stabilizing arms and a ratcheting strap. Each stabilizing arm attaches to the outer-lip of the I-beam frame (on opposite sides) of an RV with the ratcheting strap being used to create tension between the two arms, thereby providing enhanced lateral support for the RV.



Scan the QR code  
to learn more



Above. Beyond. Always.

574.293.1581 • [www.MORryde.com](http://www.MORryde.com)

## QUALIFIERS




RV must have exposed I-beams on each side for the stabilizing arms to attach to.



I-beams must be free of any obstruction(s) at the mounting location.



12 or more inches of clearance between the ground and bottom of the I-beam are required at the mounting location.

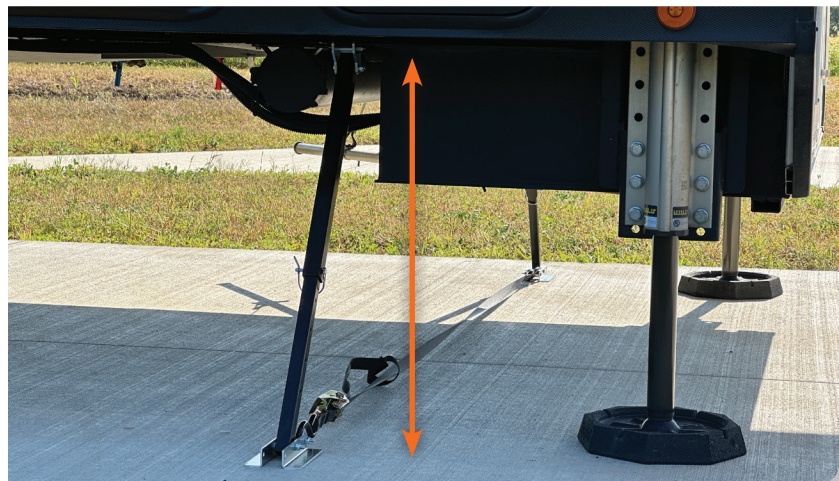

Above. Beyond. Always.

